



◆ TCD-3 ◆ Chip Terminations


Applicable to MIL-R-11804E




Dimensions

Unit : mm

TCD-3010

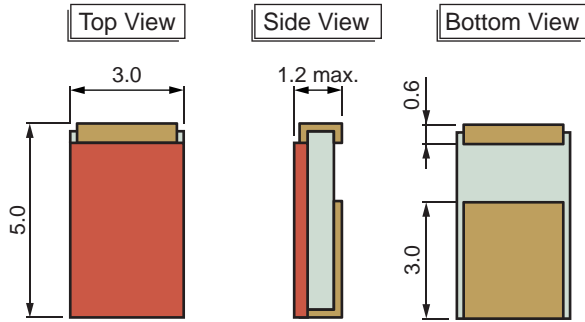

TCD-3020

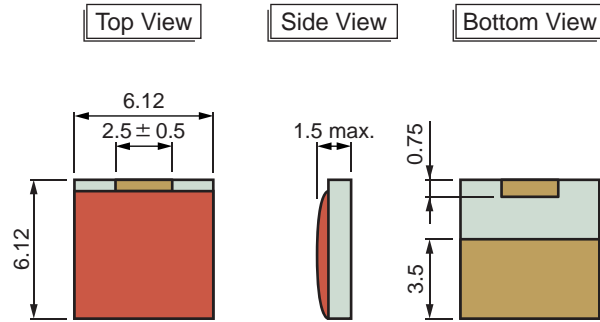


Tolerance : ± 0.2

Rating

Requirements	TCD-3010B50	TCD-3020C50
Frequency Range	DC ~ 2.5 GHz	DC ~ 2.3 GHz
VSWR	1.2 max.	1.2 max.
Impedance	50 Ω	50 Ω
Resistance Tolerance	± 2 %, ± 5 %	± 2 %, ± 5 %
T.C.R.	± 200 ppm/°C	± 200 ppm/°C
Rated Power	10 W	20 W
Working Temp. Range	- 45 °C ~ 150 °C	- 55 °C ~ 155 °C

Derating Curve

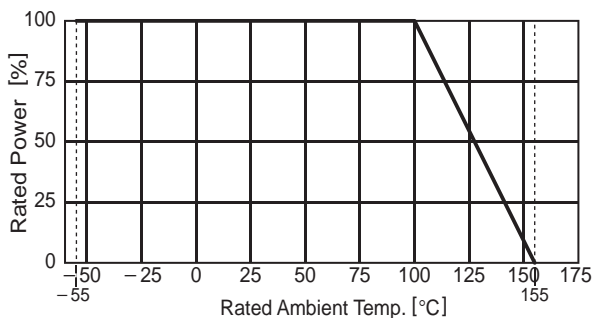

Materials

Part Name	Materials
Coating	Silicone
Resistance	Thin Film Tantalum Alloy
Electrode	Ni / Au Flash
Substrate	Aluminum Nitride

How to Code

TCD	3	010	B	50	G	G	TR
Style	No.	Rated Power	Electrode Structure	Resistance	Resistance Tolerance	Made with RoHS	Packaging
		010 10W 020 20W	B 3010 C 3020	50 50Ω	G ±2% J ±5%	- TR	Bulk Tape Reel

⚠ Specifications of products are subject to change without notice.

e-tcd3xxx-p01-07



株式会社 **MKT TAISEI Co., Ltd.**

<< Head Office >> 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.

PHONE : 81-3-3982-0029 FAX : 81-3-3986-1537 E-mail : info@mkt-taisei.com

<< Kansai Branch >> 3-18-9, Nishi-Nakajima, Yodogawa-ku, Osaka-City, 532-0011, Japan.

PHONE : 81-6-6390-7264 FAX : 81-6-6390-6945 E-mail : mkt-k@wonder.ocn.ne.jp