



Semiconductor Pressure Sensor / SP Series


FEATURES

The SP series is an inexpensive plastic package type (DIP type).
 ·These units correspond to regular equipment, measurement equipment, home electronic equipment, medical equipment and others.

MODEL


SP20C - G 102 U

Terminal Direction
 Rated Pressure
 Type of Pressure G : Gauge

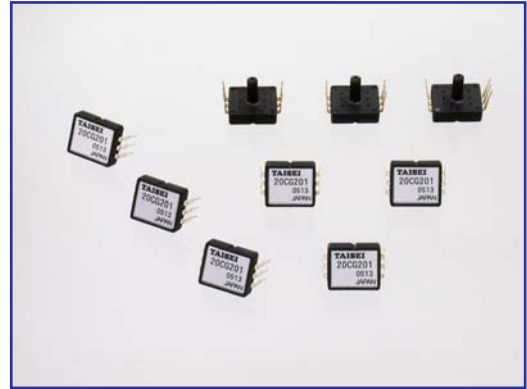

EXTERNAL DIMENSIONS AND TERMINAL ARRANGEMENT

Unit : mm

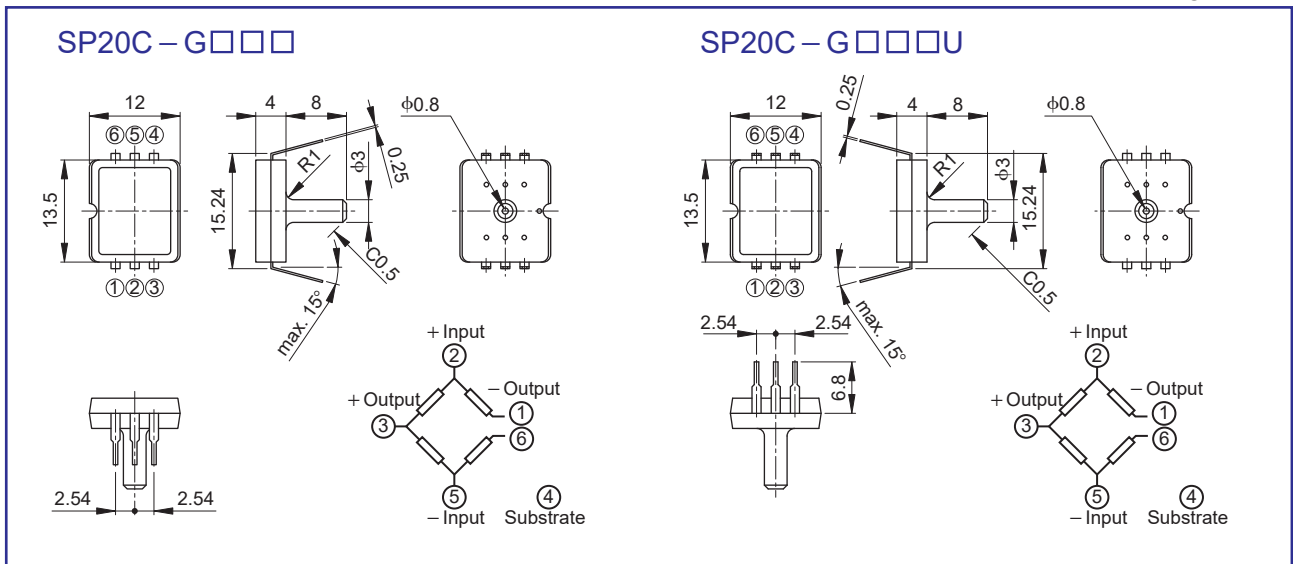

SPECIFICATIONS

Model No.	SP20C - G						
	101	201	501	102	202	502	103
Rated Pressure [kPa]	± 10	± 20	± 50	± 100	- 100 ~ 200	- 100 ~ 500	- 100 ~ 1000
Pressure Type	Gauge						
Temperature range [°C]	- 20 ~ 100						
Pressure Medium	Non-Corrosive Gases						
Excitation Current [mA]	1.5						1.0
Maximum Overload Pressure	Rated Pressure X 3						X 1.5
Output Span Voltage [mV]	60 ~ 140						
Bridge Resistance [k Ω]	5 ± 1						
Offset Voltage [mV]	0 ± 25			0 ± 20			
Offset Voltage Temperature Characteristics *1 [%FS/°C]	± 0.5			± 0.1			
Span Voltage Temperature Characteristics *1 [%FS/°C]	± 0.2			± 0.05			
Linearity [%FS]	± 1.5			± 0.3			

NOTE *1 The temperature range is 0 to 60°C. If there is no specification, the temperature range is 25 ± 5°C.
 These specifications are examples. Please contact us for other specifications.

⚠ Specifications of products are subject to change without notice.

e-sp-p01-12



<http://www.mkt-taisei.co.jp/>

株式会社 **MKT TAISEI Co., Ltd.**

< Head Office > 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.
 PHONE : 81-3-3982-0029 FAX : 81-3-3986-1537 E-mail : info@mkt-taisei.com
 < Kansai Branch > 3-18-9, Nishi-Nakajima, Yodogawa-ku, Osaka-City, 532-0011, Japan.
 PHONE : 81-6-6390-7264 FAX : 81-6-6390-6945