




Dimensional Outlines

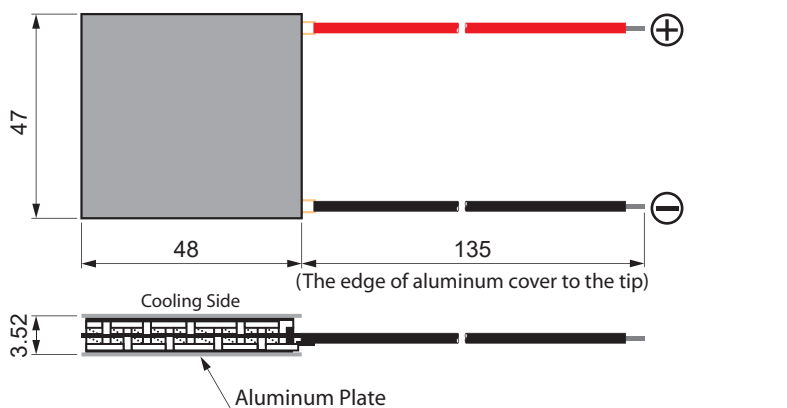


Specifications

Requirements	Specifications	Remarks
Max. Current	7.0 A	Max. Endothermic Quantity at 50 °C Th=25 °C
Max. Working V.	19.0 V (DC)	
Max. Temperature Difference	72.0 °C (typ.)	
Max. Endothermic Quantity	62.0 W (typ.)	
Internal Resistance	1.90 Ω ± 10 %	
Electrode Terminal	Lead Wire (Red : +, Black : -)	
Size	47.0 × 48.0 × 3.52 ± 0.16 [mm]	
Number of Elements	P / N Pair 127 Elements	
Lead Wire Length	135 ± 2 mm	From Edge of Separator
Weight	26.0 g ± 10 %	
Tightening Strength (Recommend)	4 ~ 6 kgf Equal Load	Commendable Condition
Working Temp. Range	120 °C max.	
Moisture Proof Seal	Silicon Resin	
Insulation Method	Elastomer	
Insulation Resistance	DC100 V, 50 MΩ min.	

Typical Performance

Electric Current vs Endothermic Quantity

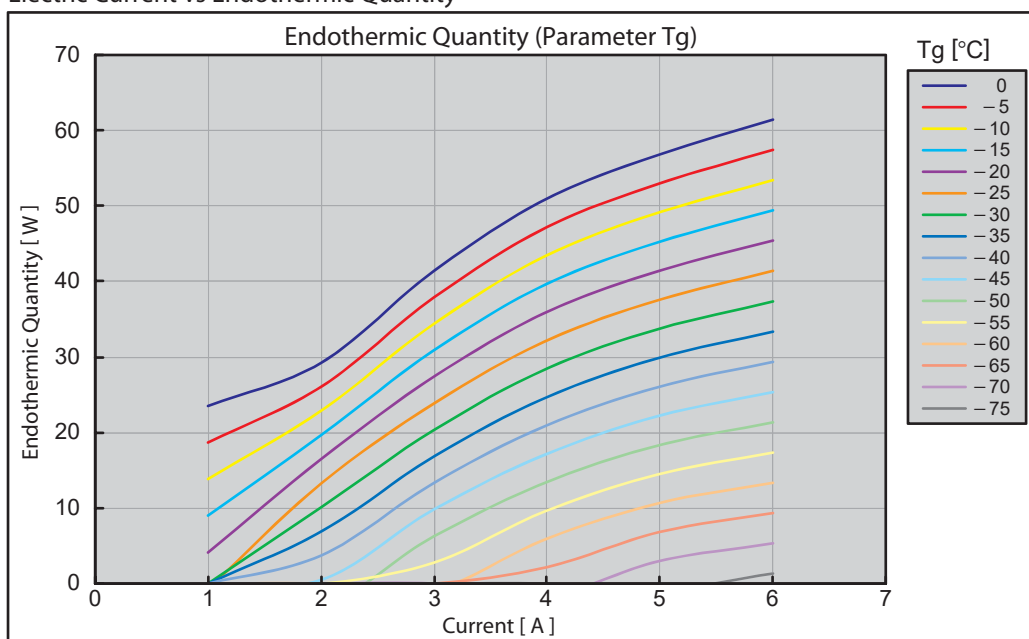

Note: The upper data shows the characteristics up to 6.0A.



* Specifications of products are subject to change without notice.

* The values are subject to the measurement results available in our internal measurement instrument and equipment.

e-ut-4040al-m_14