



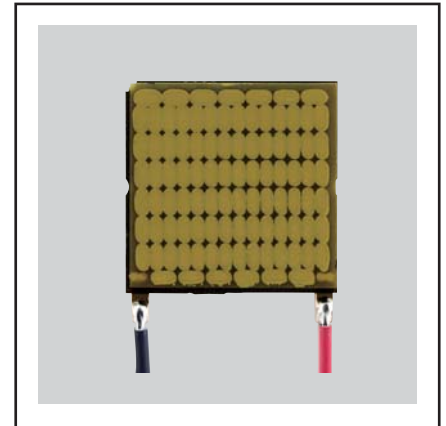

## Dimensional Outlines

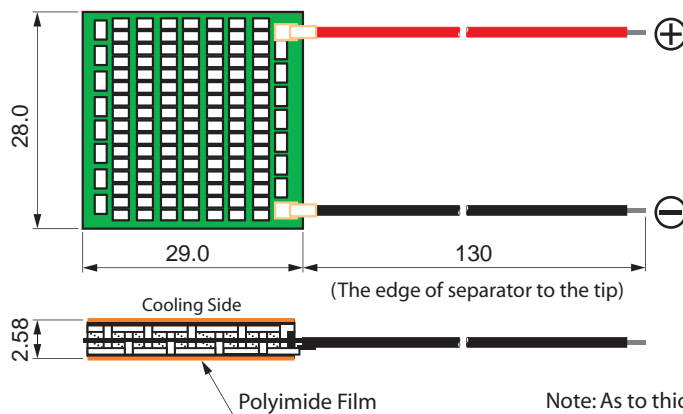

## Specifications

Requirements	Specifications	Remarks
Max. Current	3.5 A	Max. Endothermic Quantity at 50 °C
Max. Working V.	15.0 V (DC)	
Max. Temperature Difference	72.0 °C (typ.)	
Max. Endothermic Quantity	25.0 W (typ.)	
Internal Resistance	2.75 Ω ± 10 %	Th=25 °C
Electrode Terminal	Lead Wire (Red : +, Black : -)	
Size	28.0 × 29.0 × 2.58 ± 0.10 [mm]	
Number of Elements	P / N Pair 97 Elements	
Lead Wire Length	130 ± 2 mm	From Edge of Separator
Weight	8.6 g ± 10 %	
Tightening Strength (Recommend)	2 ~ 4 kgf Equal Load	Commendable Condition
Working Temp. Range	120 °C max.	
Insulation Method	Elastomer & Polyimide Film	
Insulation Resistance	DC 500 V, 500 MΩ min.	



\* Specifications of products are subject to change without notice.

\* The values are subject to the measurement results available in our internal measurement instrument and equipment.

e-ut-3030ka-m\_06