



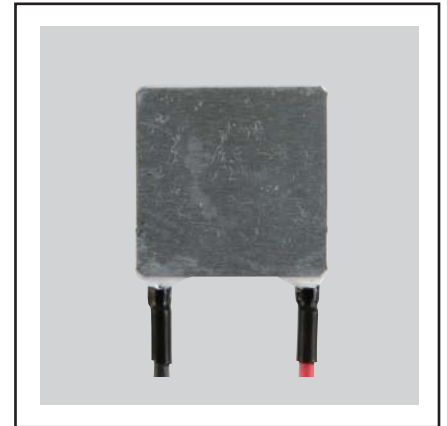

Dimensional Outlines

Unit : mm

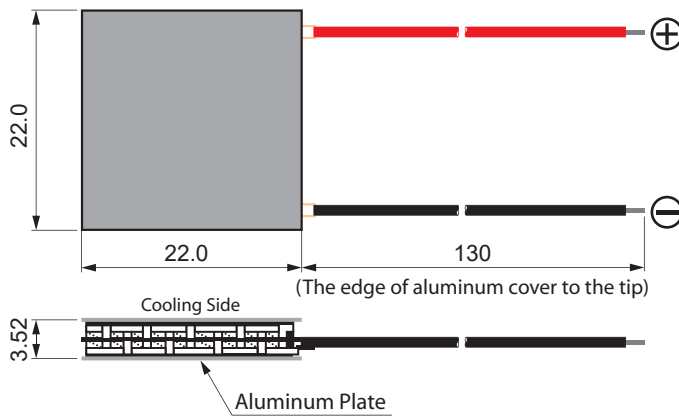

Specifications

Requirements	Specifications	Remarks
Max. Current	3.2 A	Max. Endothermic Quantity at 50 °C
Max. Working V.	6.2 V (DC)	
Max. Temperature Difference	67.0 °C (typ.)	
Max. Endothermic Quantity	13.0 W (typ.)	
Internal Resistance	1.40 Ω ± 10 %	
Electro Terminal	Lead Wire (Red : +, Black : -)	Th=25 °C
Size	22.0 × 22.0 × 3.52 ± 0.16 [mm]	
Number of Elements	P / N Pair 49 Elements	
Lead Wire Length	130 ± 2 mm	From Edge of Separator
Weight	7.3 g ± 10 %	
Tightening Strength (Recommend)	2 ~ 4 kgf Equal Load	Commendable Condition
Working Temp. Range	120 °C max.	
Moisture Proof Seal	Silicon Resin	
Insulation Method	Elastomer	
Insulation Resistance	DC100 V, 50 MΩ min.	



* Specifications of products are subject to change without notice.

* The values are subject to the measurement results available in our internal measurement instrument and equipment.

e-ut-2020al-m_08