

TP068 series Recommended Pitch 1.20 mm




Probe Standard Items


Unit:mm

TP068-NHC05-00


Needle Head 100°

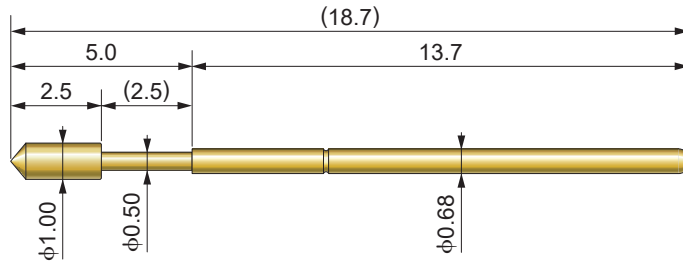

Probe Protruding Quantity



Stroke	2.5 mm	
Spring Force	16.0 gf	Preload
	50.0 gf	1.65 mm Recommended Stroke
Max. Current	3 A	
Parts Name	Material	Finish
Plunger	Steel	Au Plated
Barrel	Brass	Au Plated
Spring	Piano Wire	Au Plated

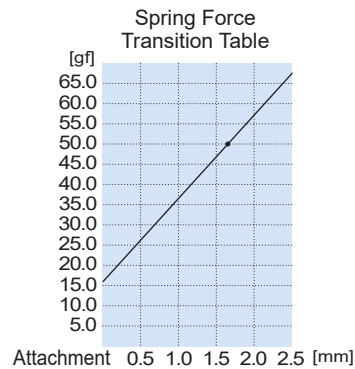

TP068-RHC05-00

Round Shaft Head




TP068-NBC05-00

Needle




TP068-4WC05-00

Crown 4-Point Taper Head



Correspondence Receptacle Standard Items

Unit:mm

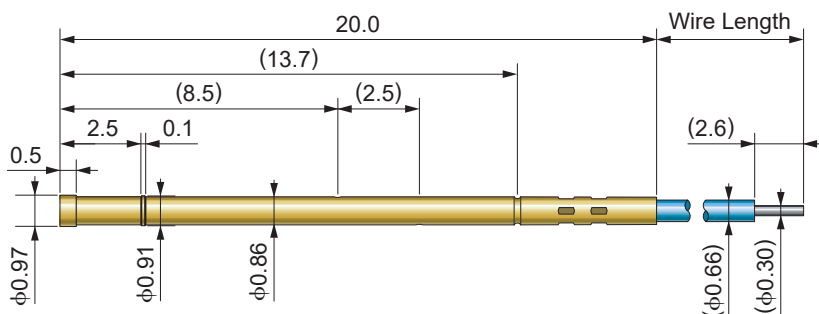

Wire Color	Product Name	Parts Name	Material	Finish
Blue	RT068-BB00	Receptacle	Phosphor Bronze	Au Plated
Wireless	RT068-BA00	Wire Insulator	Fluorine Resin	
		Wire Conductor	Silver Plated Annealed Copper Wire	

● All specifications are subject to change without notice.

TAISEI Co.,Ltd. Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken, 369-1593, JAPAN.

Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.

Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537

Web Site : <http://www.mkt-taisei.co.jp/>

e-tp068-02