


TW030 series Recommended Pitch 0.60 mm




■ TW030-NB / NB-00

Tip Needle × Needle

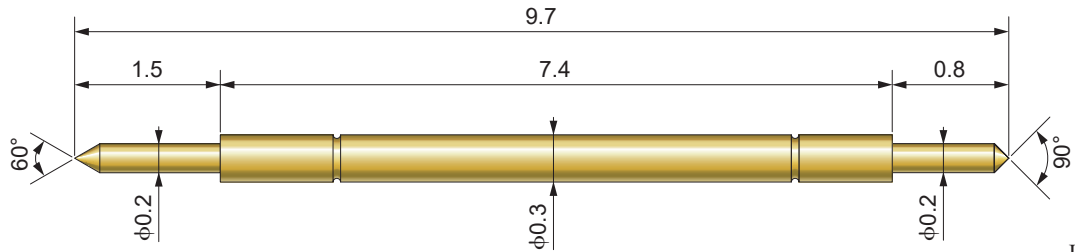


Unit:mm

Stroke	1.3 mm		
Spring Force	5.0 gf	Preload	
	12.95±2.54 gf	0.8 mm Recommended Stroke	
Max. Current	0.5 A		
Parts Name	Material	Finish	Application
Plunger	Steel	Au Plated	Needle
Plunger	Steel	Au Plated	Needle
Barrel	Phosphor Bronze	Au Plated	
Spring	Piano Wire	Au Plated	

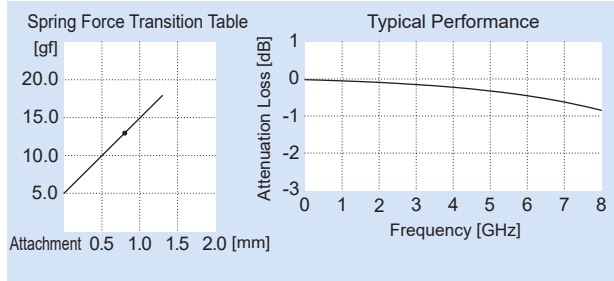


■ TW030-RB / NB-00

Tip Round Shaft × Needle

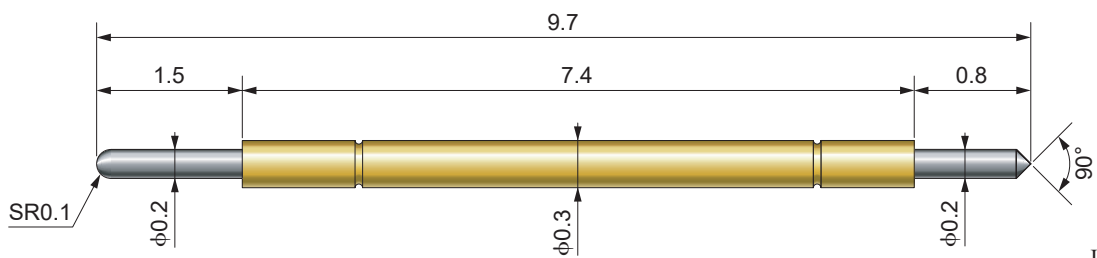

Unit:mm

Stroke	1.3 mm		
Spring Force	5.0 gf	Preload	
	12.95±2.54 gf	0.8 mm Recommended Stroke	
Max. Current	0.5 A		
Parts Name	Material	Finish	Application
Plunger	Steel	Rh Plated	Round Shaft
Plunger	Steel	Rh Plated	Needle
Barrel	Phosphor Bronze	Au Plated	
Spring	Piano Wire	Au Plated	

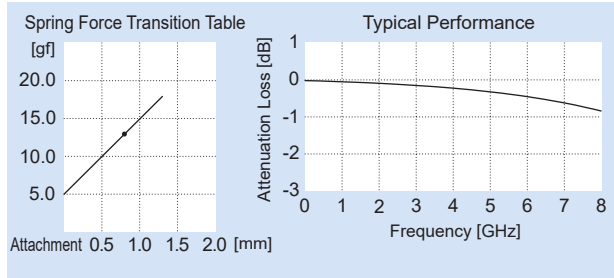

● All specifications are subject to change without notice.

TAISEI Co.,Ltd. Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken, 369-1593, JAPAN.

Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.

Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537

Web Site : <http://www.mkt-taisei.co.jp/>

e-tw030-01