


TW038,040 series Recommended Pitch 0.80 mm




■ TW038-4B / 4B-50

Tip Crown 4-Point × Crown 4-Point

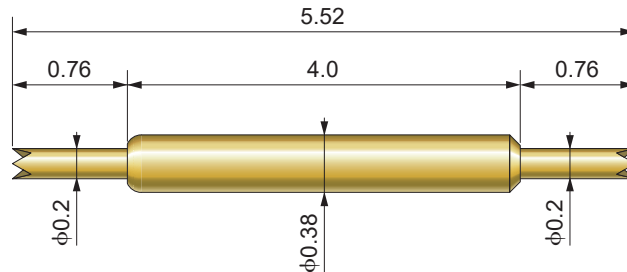


Unit:mm

Stroke	1.0 mm		
Spring Force	5.7 gf	Preload	
	15.0±3.0 gf	0.65 mm Recommended Stroke	
Max. Current	1.0 A		
Parts Name	Material	Finish	Application
Plunger	Beryllium Copper	Au Plated	Crown 4-Point
Plunger	Beryllium Copper	Au Plated	Crown 4-Point
Barrel	Phosphor Bronze	Au Plated	
Spring	Piano Wire	Au Plated	

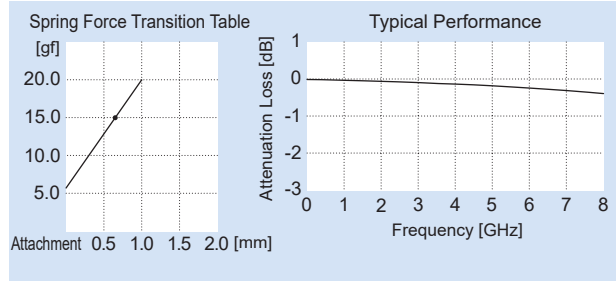


■ TW040-4B / 4B-00

Tip Crown 4-Point × Crown 4-Point

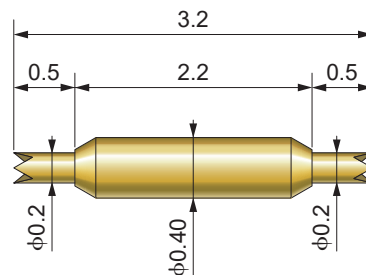

Unit:mm

Stroke	0.7 mm		
Spring Force	5.0 gf	Preload	
	17.3±3.46 gf	0.5 mm Recommended Stroke	
Max. Current	1.0 A		
Parts Name	Material	Finish	Application
Plunger	Beryllium Copper	Au Plated	Crown 4-Point
Plunger	Beryllium Copper	Au Plated	Crown 4-Point
Barrel	Phosphor Bronze	Au Plated	
Spring	Piano Wire	Au Plated	

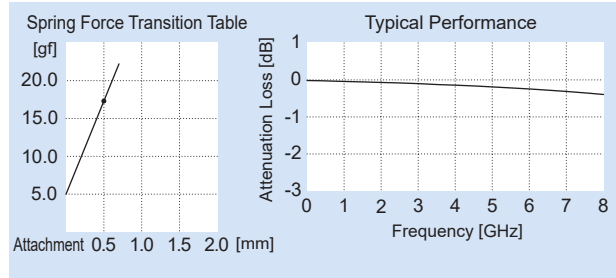

● All specifications are subject to change without notice.

TAISEI Co.,Ltd. Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken, 369-1593, JAPAN.

Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.

Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537

Web Site : <http://www.mkt-taisei.co.jp/>

e-tw038-040-01