


# SP260 series For IC Receptacle Recommended Pitch 0.35 mm



## ■ SP260-4B / RT-01 L=3.3


Tip Crown 4-Point + Lower end Straight Round Shaft

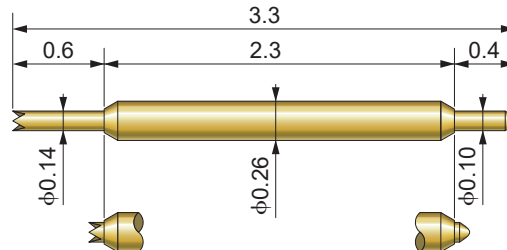

Unit:mm


Full Length(mm)	3.30	Mechanical Durability (Times or more)	20k
Recommended Stroke	0.50	Max. Current(A)	1.0
Load(gf)	25.0 @0.50mm	Contact Resistance(mΩ)	<100
Full Stroke(mm)	0.70	Working Temp.(°C)	-40~125

Parts Name	Material	Finish	Application
Plunger	Beryllium Copper	Au Plated	DUT side Crown 4-Point
Plunger	Beryllium Copper	Au Plated	I.F.side Straight Round Shaft
Barrel	NiAu	-	
Spring	Piano Wire	Au Plated	

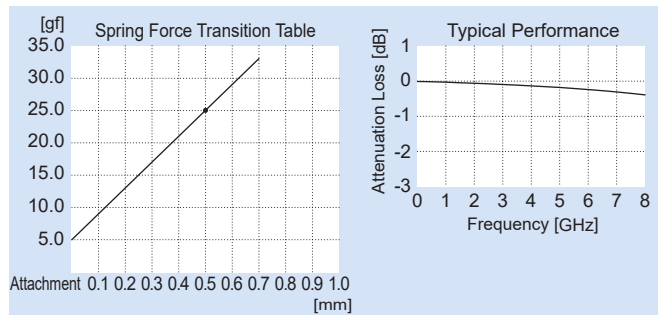

## ■ SP260-4B / RT-00 L=5.7


Tip Crown 4-Point + Lower end Straight Round Shaft

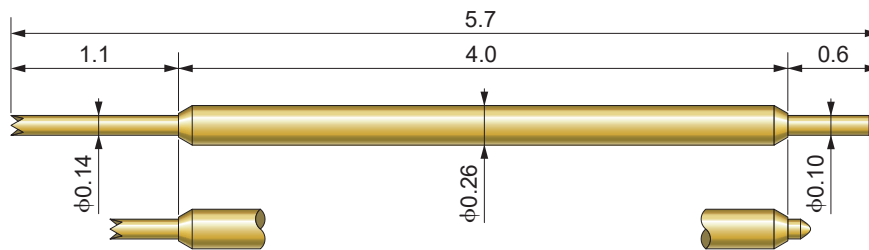

Unit:mm

Full Length(mm)	5.70	Mechanical Durability (Times or more)	300k
Recommended Stroke	0.65	Max. Current(A)	1.0
Load(gf)	21.0 @0.65mm	Contact Resistance(mΩ)	<100
Full Stroke(mm)	1.00	Working Temp.(°C)	-40~125

Parts Name	Material	Finish	Application
Plunger	Beryllium Copper	Au Plated	DUT side Crown 4-Point
Plunger	Beryllium Copper	Au Plated	I.F.side Straight Round Shaft
Barrel	NiAu	-	
Spring	Piano Wire	Au Plated	

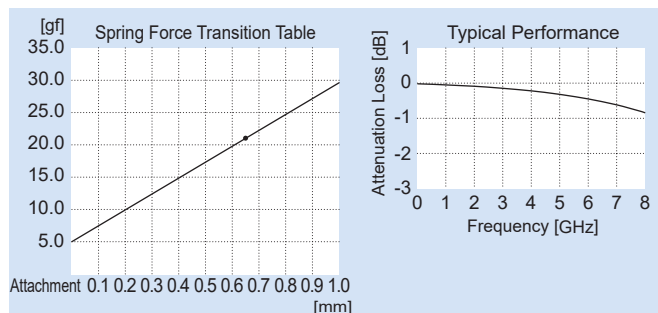

● All specifications are subject to change without notice.

**TAISEI Co.,Ltd.** Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken, 369-1593, JAPAN.  
Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.  
Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537  
Web Site : <http://www.mkt-taisei.co.jp/>

e-sp260-01