


# SP300 series For IC Receptacle Recommended Pitch 0.40 mm





## SP300-4B / RT-00 L=3.3

Tip Crown 4-Point × Round Shaft Taper

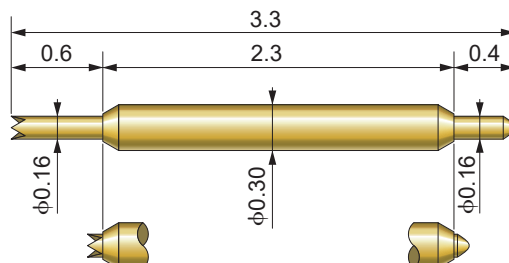


Unit:mm

Full Length(mm)	3.30	Mechanical Durability (Times or more)	200k
Recommended Stroke	0.50	Max. Current(A)	1.0
Load (gf)	31.2 @0.50mm	Contact Resistance(mΩ)	<100
Full Stroke(mm)	0.70	Working Temp.(°C)	-40~125
Parts Name	Material	Finish	Application
Plunger	Beryllium Copper	Au Plated	DUT side Crown 4-Point
Plunger	Beryllium Copper	Au Plated	I.F. side Round Shaft Taper
Barrel	NiAu	-	
Spring	Piano Wire	Au Plated	





## SP300-4B / RB-00 L=5.7

Tip Crown 4-Point × Round Shaft

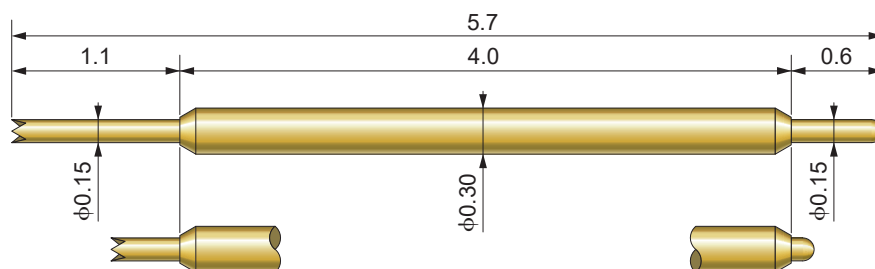

Unit:mm

Full Length(mm)	5.70	Mechanical Durability (Times or more)	1M
Recommended Stroke	0.65	Max. Current(A)	1.6
Load (gf)	30.0 @0.65mm	Contact Resistance(mΩ)	<100
Full Stroke(mm)	0.80	Working Temp.(°C)	-40~125
Parts Name	Material	Finish	Application
Plunger	Beryllium Copper	Au Plated	DUT side Crown 4-Point
Plunger	Beryllium Copper	Au Plated	I.F. side Round Shaft
Barrel	NiAu	-	
Spring	Piano Wire	Au Plated	



● All specifications are subject to change without notice.

**TAISEI Co.,Ltd.** Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken, 369-1593, JAPAN.

Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.

Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537

Web Site : <http://www.mkt-taisei.co.jp/>

e-sp300-02