


Probe Standard Items


Unit:mm

TP026-NHC01-00


Needle Head 60°

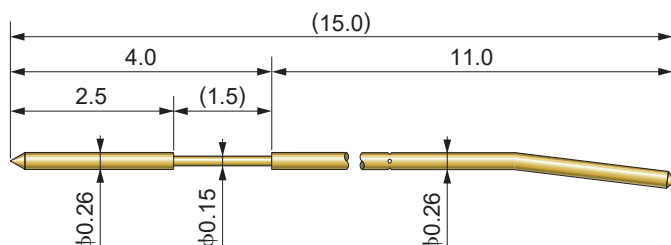

Probe Protruding Quantity when Inserting into RT026

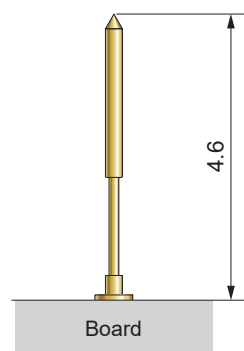

Stroke	1.5 mm	
Spring Force	6.22 gf	Preload
	15.0 gf	1.0 mm Recommended Stroke
Max. Current	1 A	
Parts Name	Material	Finish
Plunger	Steel	Au Plated
Barrel	Phosphor Bronze	Au Plated
Spring	Piano Wire	Au Plated




TP026-RHC01-00

Round Shaft Head




TP026-NBC01-00

Needle 60°




TP026-4WC01-00

Crown 4-Point Taper Head



Correspondence Receptacle Standard Items

Unit:mm

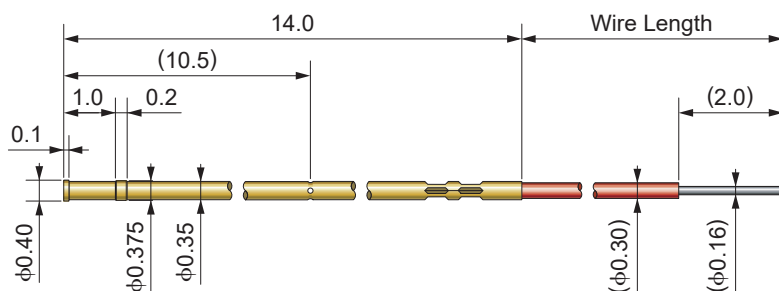

Wire Color	Product Name	Parts Name	Material	Finish
Red	RT026-BR11	Receptacle	Phosphor Bronze	Au Plated
Blue	RT026-BB11	Wire	Insulator	Fluorine Resin
Wireless	RT026-BA11		Conductor	Silver Plated Annealed Copper Wire

● All specifications are subject to change without notice.

TAISEI Co.,Ltd. Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken, 369-1593, JAPAN.

Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.

Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537

Web Site : <http://www.mkt-taisei.co.jp/>

e-tp026-03