

# TP031 series Recommended Pitch 0.60 mm




## Probe Standard Items


Unit:mm

### TP031-NHC03-00


Needle Head 60°

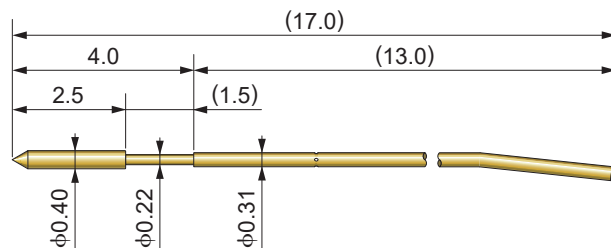

Probe Protruding Quantity when Inserting into RT031



Stroke	1.5 mm	
Spring Force	15.3 gf	Preload
	30.0 gf	1.0 mm Recommended Stroke
Max. Current	1 A	
Parts Name	Material	Finish
Plunger	Steel	Au Plated
Barrel	Phosphor Bronze	Au Plated
Spring	Piano Wire	Au Plated

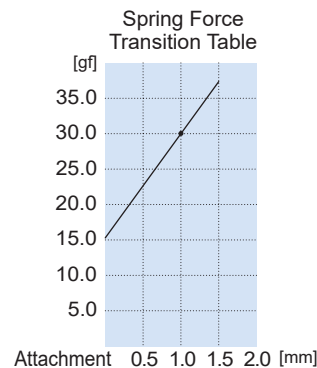


### TP031-RHC03-00

Round Shaft Head



### TP031-NBC03-00

Needle 60°




### TP031-4WC03-00

Crown 4-Point Taper Head



## Correspondence Receptacle Standard Items

Unit:mm

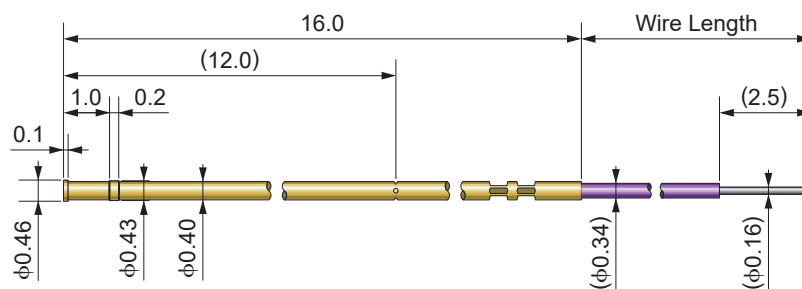

Wire Color	Product Name	Parts Name	Material	Finish
Purple	RT031-BP11	Receptacle	Phosphor Bronze	Au Plated
Yellow	RT031-BY11	Wire	Insulator	Fluorine Resin
Wireless	RT031-BA11		Conductor	Silver Plated Annealed Copper Wire

● All specifications are subject to change without notice.

**TAISEI Co.,Ltd.** Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken, 369-1593, JAPAN.

Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.  
Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537

Web Site : <http://www.mkt-taisei.co.jp/>

e-tp031-03