

- ★ A wide option of size in each part and spring force are fully provided with our probes and receptacles.
- ★ A full variation for materials, finish, and projection quantity of our probes are also supplied.


STANDARD SPECIFICATION

Stroke	1.5 mm	
Spring Force	0.150 N	Preload
	0.294 N	Recommended Travel (2/3)
Max. Current	1 A	
Contact Resistance	90 mΩ	Probe

STANDARD MATERIALS / FINISH

Parts Name	Materials	Finish
Plunger	S K	Ni-Base Rh Plated
Barrel	P B	Ni-Base Au Plated
Spring	S W P	Ni-Base Au Plated
Receptacle	P B	Ni-Base Au Plated

RECEPTACLE SHAPE

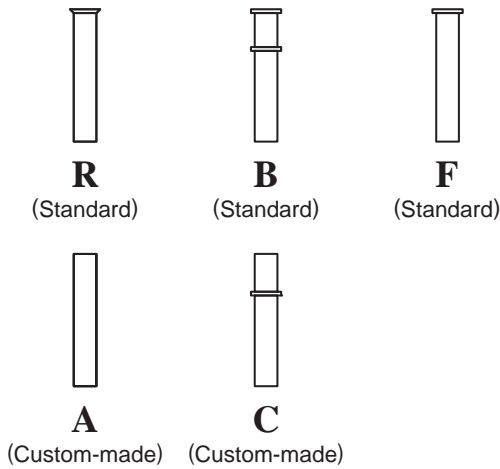


HOW TO CODE FOR RECEPTACLE PRODUCTS

RT031 - RY00 - ***

① Outer Shape	② Wire	③ Serial No.	④ Wire Length
Refer to "RECEPTACLE SHAPE CODE"	A Wireless	Tracing No.	Unit : mm
	Y Yellow		
	P Purple		

- In case of the socket with wire, please specify the length of wire and its stripped length.
- All specifications are subject to change without notice.

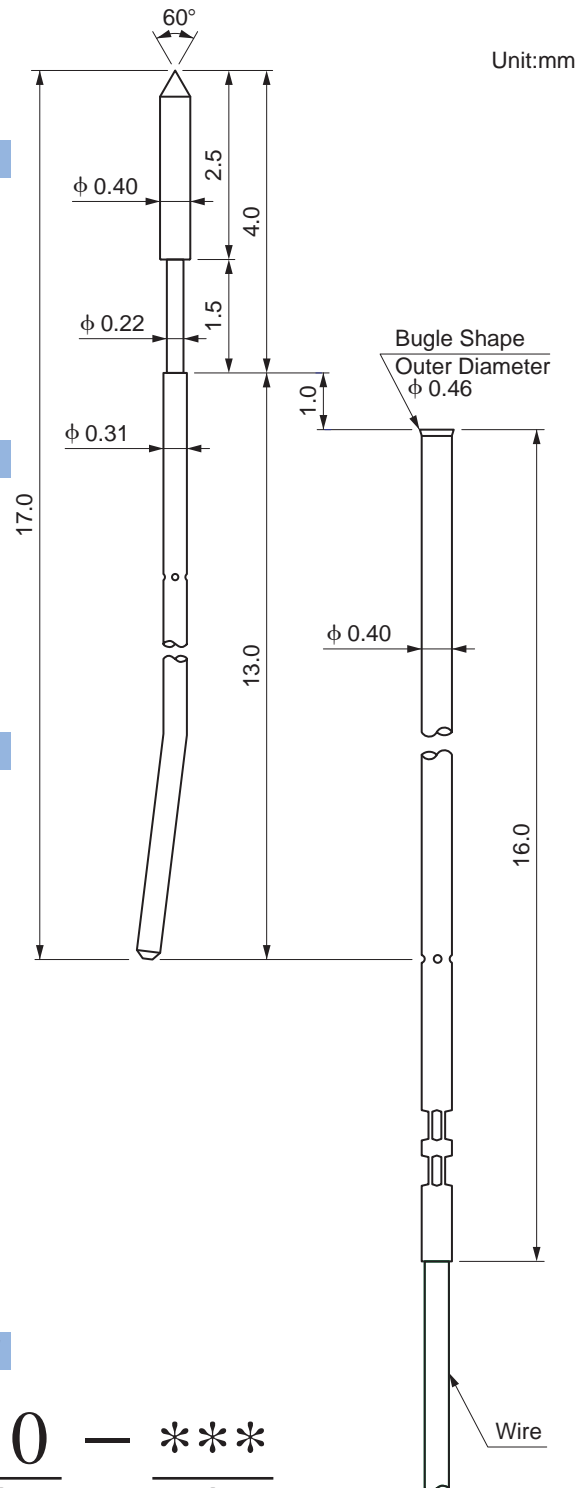

HOW TO CODE FOR PROBE


TP031 - NHY03 - 00

① Plunger Configuration	② Plunger Materials / Finish	③ Spring Force	④ Serial No.
Refer to the following "PLUNGER CONFIGURATIONS"	Standard Specs	Standard Specs	Tracing No.
	Y SK + Rh Plated	03 0.294 N	
	Custom Specs	Custom Specs	
	Z SK + Ni Plated	01 0.050N ~ 0.149 N	
	C SK + Au Plated	02 0.150N ~ 0.249 N	
	L BeCu + Ni Plated	03 0.250N ~ 0.349 N	
	J BeCu + Au Plated		
	G BeCu + Rh Plated		
	X Others		


PLUNGER CONFIGURATIONS

Unit:mm


NHY03-00
(Standard)




NUY03-00
(Standard)




NBY03-00
(Standard)




RHY03-00
(Standard)




4WY03-00
(Standard)




FWY03-00
(Standard)




RBW03-00
(Standard)




FBW03-00
(Standard)




4BY03-03
(Standard)




RWY03-00
(Custom)




4TY03-00
(Custom)




4HY03-00
(Custom)



FHY03-00
(Custom)



FTY03-00
(Custom)



EHY03-00
(Custom)

