

- ★ A wide option of size in each part and spring force are fully provided with our probes and receptacles.
- ★ A full variation for materials, finish, and projection quantity of our probes are also supplied.


STANDARD SPECIFICATION

Stroke	2.5 mm	
Spring Force	0.157 N	Preload
	0.490 N	Recommended Travel (2/3)
Max. Current	3 A	
Contact Resistance	30 mΩ	Probe

STANDARD MATERIALS / FINISH


Parts Name	Materials	Finish
Plunger	S K	Ni-Base Rh Plated
Barrel	B S	Ni-Base Au Plated
Spring	S W P	Ni-Base Au Plated
Receptacle	B S	Ni-Base Au Plated

RECEPTACLE SHAPE

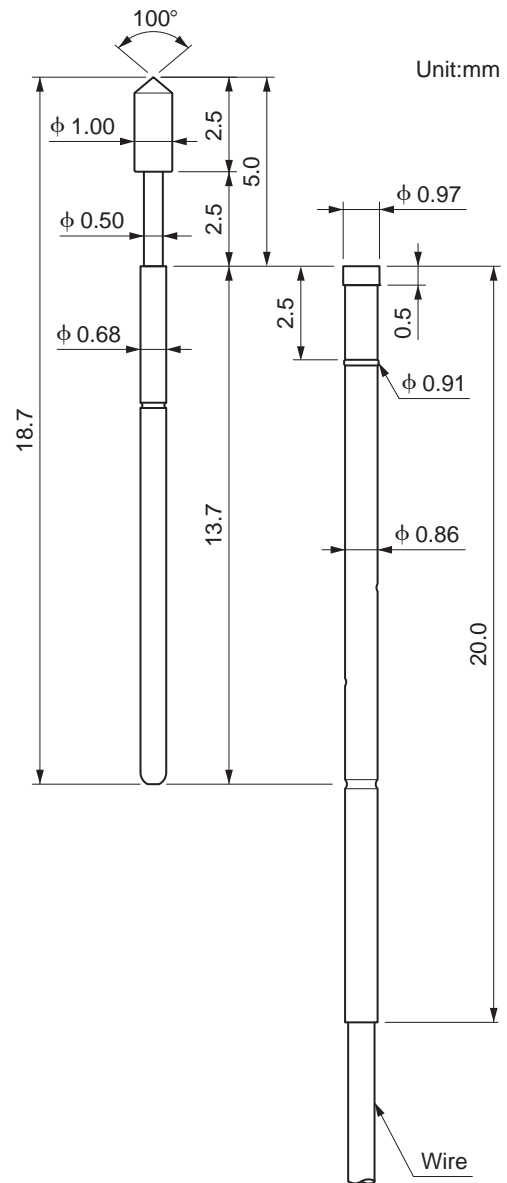

HOW TO CODE FOR RECEPTACLE PRODUCTS

RT068 - BA00 - ***

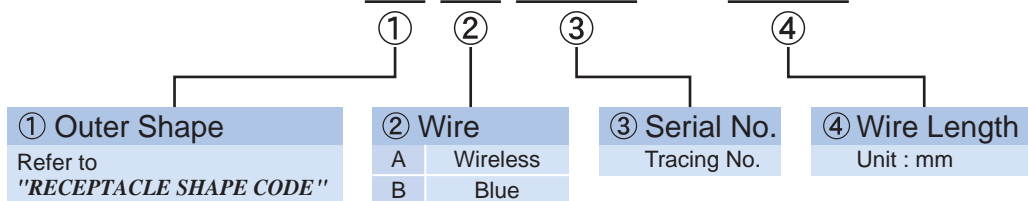

- In case of the socket with wire, please specify the length of wire and it's stripped length.
- All specifications are subject to change without notice.

HOW TO CODE FOR PROBE

TP068 - NHY05 - 00

<p>① Plunger Configuration</p> <p>Refer to the following "PLUNGER CONFIGURATIONS"</p>	<p>② Plunger Materials / Finish</p> <table border="1"> <tr><td>Standard Specs</td></tr> <tr><td>Y SK+Rh Plated</td></tr> <tr><td>Custom Specs</td></tr> <tr><td>Z SK+Ni Plated</td></tr> <tr><td>C SK+Au Plated</td></tr> <tr><td>L BeCu+Ni Plated</td></tr> <tr><td>J BeCu+Au Plated</td></tr> <tr><td>G BeCu+Rh Plated</td></tr> <tr><td>X Others</td></tr> </table>	Standard Specs	Y SK+Rh Plated	Custom Specs	Z SK+Ni Plated	C SK+Au Plated	L BeCu+Ni Plated	J BeCu+Au Plated	G BeCu+Rh Plated	X Others	<p>③ Spring Force</p> <table border="1"> <tr><td>Standard Specs</td></tr> <tr><td>05 0.490 N</td></tr> <tr><td>Custom Specs</td></tr> <tr><td>01 0.050 N ~ 0.149 N</td></tr> <tr><td>02 0.150 N ~ 0.249 N</td></tr> <tr><td>03 0.250 N ~ 0.349 N</td></tr> <tr><td>04 0.350 N ~ 0.449 N</td></tr> <tr><td>05 0.450 N ~ 0.549 N</td></tr> </table>	Standard Specs	05 0.490 N	Custom Specs	01 0.050 N ~ 0.149 N	02 0.150 N ~ 0.249 N	03 0.250 N ~ 0.349 N	04 0.350 N ~ 0.449 N	05 0.450 N ~ 0.549 N	<p>④ Serial No.</p> <p>Tracing No.</p> <table border="1"> <tr><td>06 0.550 N ~ 0.649 N</td></tr> <tr><td>07 0.650 N ~ 0.749 N</td></tr> <tr><td>08 0.750 N ~ 0.849 N</td></tr> <tr><td>09 0.850 N ~ 0.949 N</td></tr> <tr><td>10 0.950 N ~ 1.049 N</td></tr> </table>	06 0.550 N ~ 0.649 N	07 0.650 N ~ 0.749 N	08 0.750 N ~ 0.849 N	09 0.850 N ~ 0.949 N	10 0.950 N ~ 1.049 N
Standard Specs																									
Y SK+Rh Plated																									
Custom Specs																									
Z SK+Ni Plated																									
C SK+Au Plated																									
L BeCu+Ni Plated																									
J BeCu+Au Plated																									
G BeCu+Rh Plated																									
X Others																									
Standard Specs																									
05 0.490 N																									
Custom Specs																									
01 0.050 N ~ 0.149 N																									
02 0.150 N ~ 0.249 N																									
03 0.250 N ~ 0.349 N																									
04 0.350 N ~ 0.449 N																									
05 0.450 N ~ 0.549 N																									
06 0.550 N ~ 0.649 N																									
07 0.650 N ~ 0.749 N																									
08 0.750 N ~ 0.849 N																									
09 0.850 N ~ 0.949 N																									
10 0.950 N ~ 1.049 N																									

PLUNGER CONFIGURATIONS

Unit:mm

