

- ★ A wide option of size in each part and spring force are fully provided with our probes and receptacles.
- ★ A full variation for materials, finish, and projection quantity of our probes are also supplied.



STANDARD SPECIFICATION

Stroke	3.0mm	
Spring Force	0.324 N	Preload
	0.981 N	Recommended Travel (2/3)
Max. Current	5 A	
Contact Resistance	30 mΩ	Probe

STANDARD MATERIALS / FINISH

Parts Name	Materials	Finish
Plunger	S K	Ni-Base Rh Plated
Barrel	B S	Ni-Base Au Plated
Spring	S U S	
Receptacle	B S	Ni-Base Au Plated

RECEPTACLE SHAPE

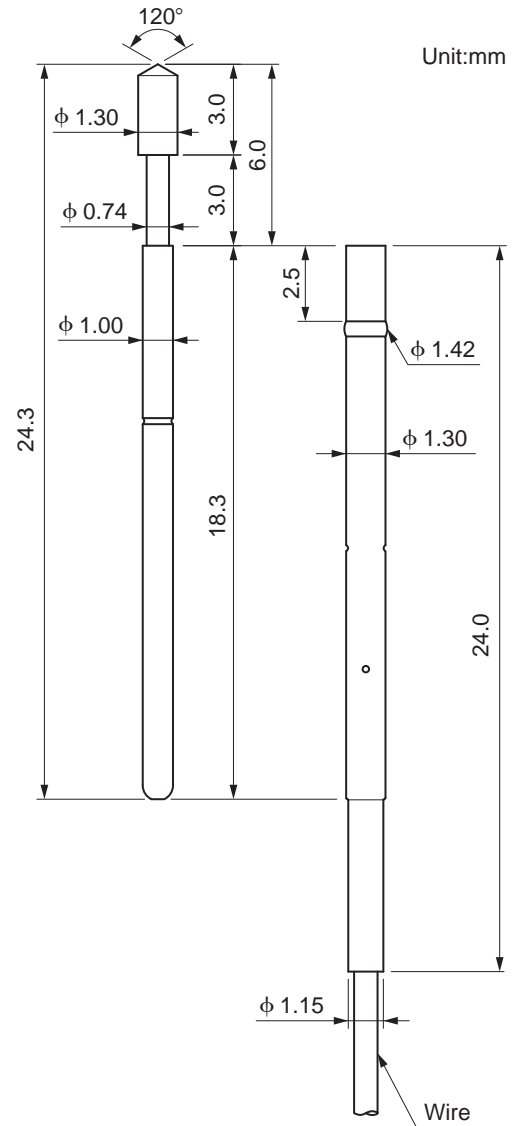

HOW TO CODE FOR RECEPTACLE PRODUCTS

RT100 - GA00 - ***

① Outer Shape	② Wire	③ Serial No.	④ Wire Length
Refer to "RECEPTACLE SHAPE CODE"	A Wireless R Red	Tracing No.	Unit : mm

- In case of the socket with wire, please specify the length of wire and it's stripped length.
- All specifications are subject to change without notice.

Probe TP100-NHY10-00

Receptacle RT100-GA00



HOW TO CODE FOR PROBE

TP100 - NHY10 - 00

① Plunger Configuration

Refer to the following
"PLUNGER CONFIGURATIONS"

② Plunger Materials / Finish

Standard Specs	
Y	SK+Rh Plated
Custom Specs	
Z	SK+Ni Plated
C	SK+Au Plated
L	BeCu+Ni Plated
J	BeCu+Au Plated
G	BeCu+Rh Plated
X	Others

③ Spring Force

Standard Specs	
10	0.981 N
Custom Specs	
06	0.550 N ~ 0.649 N
07	0.650 N ~ 0.749 N
08	0.750 N ~ 0.849 N
09	0.850 N ~ 0.949 N
10	0.950 N ~ 1.049 N
11	1.050 N ~ 1.149 N
12	1.150 N ~ 1.249 N


④ Serial No.

Tracing No.


PLUNGER CONFIGURATIONS

Unit:mm


NHY10-00
(Standard)




NUY10-00
(Standard)




VHY10-00
(Standard)




SHG10-00
(Standard)




RHY10-00
(Standard)




4WY10-00
(Standard)




EHY10-00
(Standard)




NBY10-00
(Custom)




4HY10-00
(Custom)




4BY10-00
(Custom)




4TY10-00
(Custom)




FBY10-00
(Custom)




FWY10-00
(Custom)




FTY10-00
(Custom)




VBY10-00
(Custom)




RBG10-00
(Custom)




RWY10-01
(Custom)




DHY10-00
(Custom)




DBY10-00
(Custom)



MHG10-00
(Custom)



AHY10-00
(Custom)



TAISEI Co.,Ltd. Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken,
369-1593, JAPAN.

Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.
Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537

Web Site : <http://www.mkt-taisei.co.jp/>

e-tp100-p02-09