



Pressure Sensor Non-influenced by Noise / SPAN Series

FEATURES

- Can be used in environments where high-frequency noise occurs.
- Insulation separation structure is adopted in the sensor case.
- High output and high reliability achieved through combination of metal diaphragm and thin film gauge.
- High insulation.
- Wide operating temperature range.
- Small size.



Unit : mm

EXTERNAL DIMENSIONS AND TERMINAL ARRANGEMENT

Dimensions:A

Specifications	A
Voltage Output	58±2
Free Power Supply / Current Output	68±2

Terminal Arrangement

Wire Color

Signal Name	Wire Color
Power Supply	Red
GND	Black
Output	White

Recommended Dimensions for Sensor Mounting Holes



58 connector V Type Part No.

M terminal	7114-1260
M housing	Dedicated Housing
F terminal	7116-1261
F housing	7123-1835
Waterproof Stopper	7157-3596-30


SPECIFICATIONS

Model No.	SPAN-○○-△□
Rated Pressure	5 · 10 · 20 · 35 · 50 MPa
Overload	150%FS
Total Accuracy	±1.0%FS or less
Operating Temperature range	-40 ~ +120 °C (at DC 5V)
Compensation Temperature range	-20 ~ +85 °C
Power Supply	DC 5V · 12V · 24V · 8 ~ 35V
Output	0.5 ~ 4.5V · 1 ~ 5V · 4 ~ 20mA
Zero temperature Characteristics	Within ±0.025%FS/°C
Span temperature Characteristics	Within ±0.025%FS/°C
Response Time	2 ms or less
Weight	About 60 g
IP Protection Rating	IP67equivalent

Total Accuracy = $\sqrt{(\text{Linearity})^2 + (\text{Hysteresis})^2 + (\text{Reproducibility})^2}$

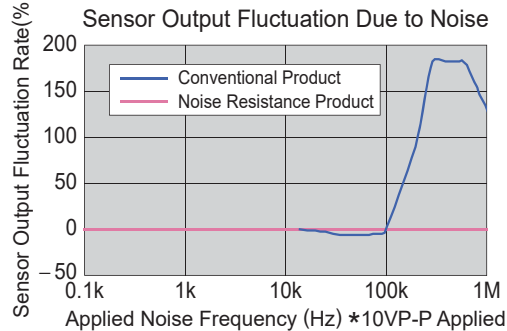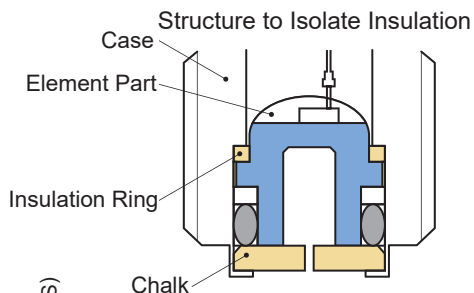

MODEL NUMBER CONFIGURATION



① Rated Pressure	05	5 MPa	② Input Voltage		③ Output Format					
	10	10 MPa		Voltage Output Specifications		5	5 V	Voltage Output	H	0.5 ~ 4.5 V
	20	20 MPa				6	12 V		G	1 ~ 5 V
	35	35 MPa				0	8 ~ 35 V(Free Power Supply)	Current Output	I	4 ~ 20 mA
	50	50 MPa		Current Output Specifications		7	24 V			

- Ex.1) 10 MPa · Input Voltage 12 V · Voltage Output (0.5 to 4.5 V) → SPAN-10-6H
 Ex.2) 35 MPa · Free Power Supply 24 V · Voltage Output (0.5 to 4.5 V) → SPAN-35-0H
 Ex.3) 50 MPa · Input Voltage 24 V · Current Output → SPAN-50-7I
 Ex.4) 5 MPa · Free Power Supply and Voltage Output (1 to 5 V) → SPAN-05-0G

⚠ Specifications of products are subject to change without notice.

e-span-p01-02



http://www.mkt-taisei.co.jp/

株式会社 **MKT TAISEI** — MKT TAISEI Co.,Ltd.

< Head Office > 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.
 PHONE : 81-3-3982-0029 FAX : 81-3-3986-1537 E-mail : info@mkt-taisei.com
 < Kansai Branch > 3-18-9, Nishi-Nakajima, Yodogawa-ku, Osaka-City, 532-0011, Japan.
 PHONE : 81-6-6390-7264 FAX : 81-6-6390-6945 E-mail : mkt-k@wonder.ocn.ne.jp