


Probe Standard Items


Unit:mm

TP100-NHC10-00


Needle Head 120°

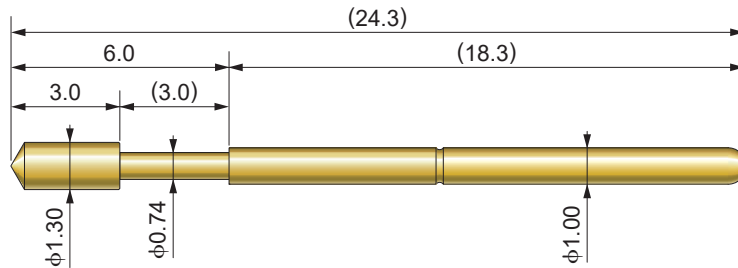

Probe Protruding Quantity



Stroke	3.0 mm	
Spring Force	33.0 gf	Preload
	100.0 gf	2.0 mm Recommended Stroke
Max. Current	5 A	
Parts Name	Material	Finish
Plunger	Steel	Au Plated
Barrel	Brass	Au Plated
Spring	Stainless	

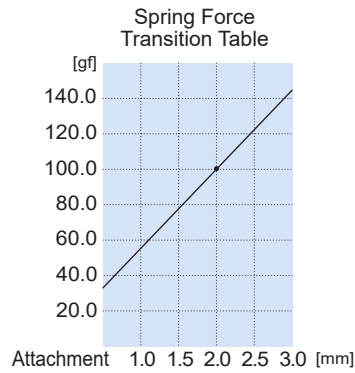


TP100-RHC10-00

Round Shaft Head




TP100-4WC10-00

Crown 4-Point Taper Head



Correspondence Receptacle Standard Items

Unit:mm

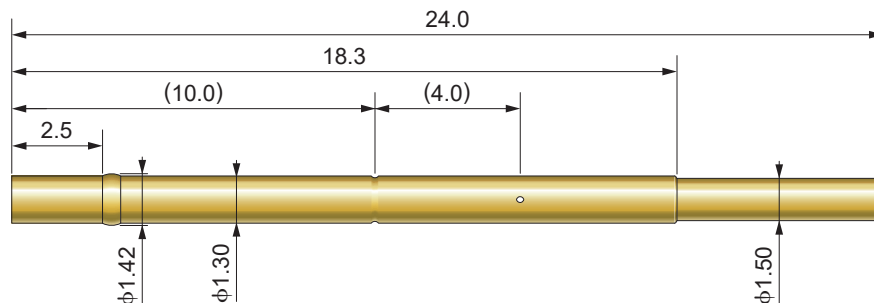

Wire Color	Product Name	Parts Name	Material	Finish
Red	RT100-GR00	Receptacle	Phosphor Bronze	Au Plated
Wireless	RT100-GA00	Insulator	Fluorine Resin	
		Conductor	Silver Plated Annealed Copper Wire	

● All specifications are subject to change without notice.

TAISEI Co.,Ltd. Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken,
369-1593, JAPAN.
Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.
Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537
Web Site : <http://www.mkt-taisei.co.jp/>