


Double Sided Probe TW065,068 Type



Model Name : TW065-RT/NB-00

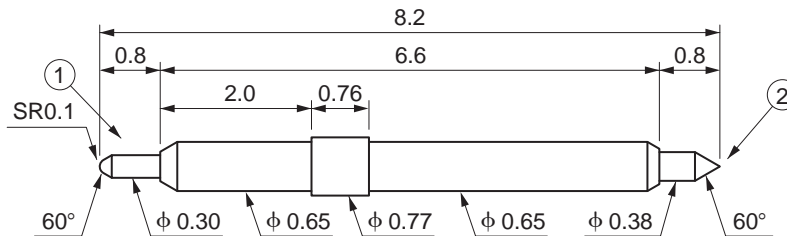

Unit:mm


SPECIFICATIONS

Stroke	0.8 mm + 0.8 mm	
Spring Force	0.066 N	Preload
	0.198 N	Recommended Travel (1.0mm)
Max. Current	1 A	

MATERIALS / FINISH

Parts Name	Materials	Finish
① Plunger	B e C u	Ni-Base Au Plated
② Plunger	S K	Ni-Base Rh Plated
Barrel	P B	Ni-Base Au Plated
Spring	S W P	Ni-Base Au Plated

Model Name : TW068-NB/NB-01

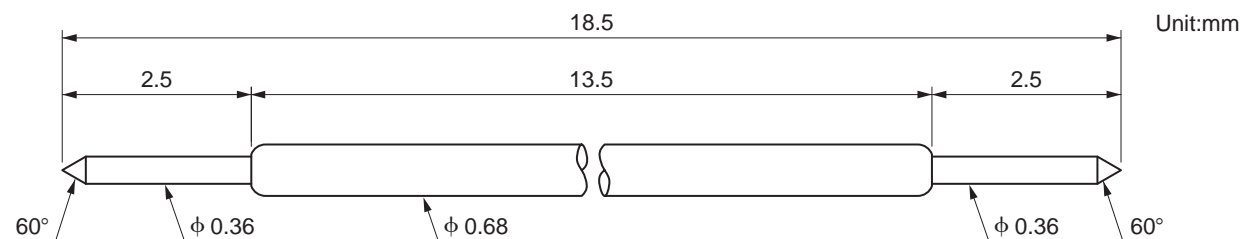

Unit:mm

SPECIFICATIONS

Stroke	1.5 mm + 1.5 mm	
Spring Force	0.059 N	Preload
	0.235 N	Recommended Travel (1.5mm)
Max. Current	1 A	

MATERIALS / FINISH

Parts Name	Materials	Finish
Plunger	S K	Ni-Base Au Plated
Barrel	B S	Ni-Base Au Plated
Spring	S W P	Ni-Base Au Plated

● All specifications are subject to change without notice.

TAISEI Co.,Ltd. Head Office Sales Dept.

Address : 6972 Shimo-Yoshida, Chichibu-shi, Saitama-ken,
369-1593, JAPAN.

Phone : +81-494-77-1211 / FAX : +81-494-77-1415

Sales Office **MKT TAISEI Co.,Ltd.**

Address : 3-10-8, Nohagi 1st Bldg, Minami-Ikebukuro, Toshima-ku, Tokyo, 171-0022, Japan.

Phone : +81-3-3982-0029 / FAX : +81-3-3986-1537

Web Site : <http://www.mkt-taisei.co.jp/>

e-tw068-p1-05